




Application

The GPN 601 thin-walled plugs can be used as a cap or plug and are suitable for the protection of external threads or to close bore holes and openings. The thin-walled design results in faster assembly and disassembly and lower material consumption in production. The conical shape is ideal for accommodating tolerances.

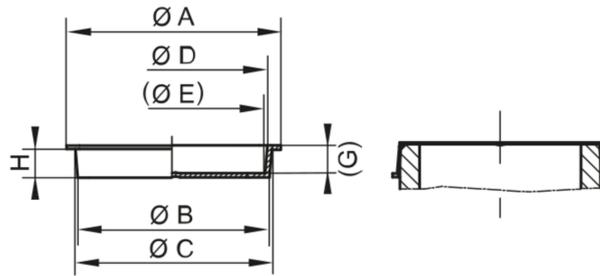

PE-LLD
red

Article	A	B	C	D	E	G	H	Virgin material
GPN 601 D 728	79	68,7	71,2	69,6	67,2	13,5	13,5	60107280000
GPN 601 D 1055*	110	103	105,5	104	102	17	16	60110550000
GPN 601 D 1070	117	105	107	106	103,5	17,2	16	60110700000
GPN 601 D 1090	117	107	109	108	106	19	17	60110900000
GPN 601 D 1215	128	119,5	121,5	120	118	15,9	15,3	60112150000
GPN 601 D 1230	130	120	123	121,5	118	24,4	23	60112300000
GPN 601 D 1290	136	126	129	128	125	26,5	25	60112900000
GPN 601 D 1306	136	128	130,6	129	127	24,2	23	60113060000
GPN 601 D 1380	144	135	138	137	134	24,4	23	60113800000

Dimensions in mm.

* This size is supplied with hole.

Information on materials, colours, designs and use of our products can be found on the website and in chapter 3 'Materials and application'.

Your added values:



Saves time.

Easy handling due to being a thinner walled version of the GPN 600.



More resource-saving.

Significantly lower material usage compared to other conical closures made of PE-LD or PE-LLD.



More versatile.

Can be used universally as plug or cap. The tapered design is ideal for accommodating tolerances.



Cleaner.

Production in accordance with VDA Band 19 and ISO 16232 in our cleanroom on request.



Better.

To close off bore holes and internal openings, or to protect studs and external threads.