

Sealing Screw Plugs with O-Ring



GPN 738



www.poeppele.com/en/gpn738

Application

The GPN 738 sealing screw plugs with O-ring are suitable for closing screw holes as per DIN 3852-1 and ISO 11926 and are particularly well suited for increased demands on leak tightness. The robust material is high-quality and particularly impact-resistant. The circumferential sealing lip, which is designed without a mould seam, and the O-ring prevent the penetration and leakage of liquids within certain limits. Installation is carried out using a screwdriver or spanner.

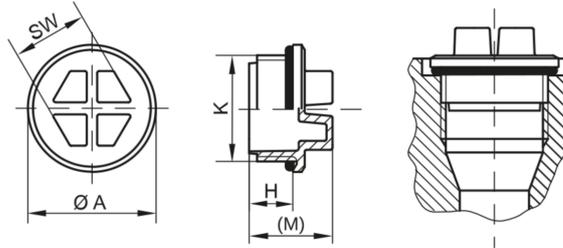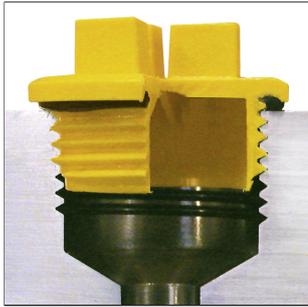

PA 6 yellow

Article	A	Thread K	H	M	Wrech width metric	Virgin material
GPN 738 M 10 x 1	15,4	M 10 x 1	8	15	7	73810100000
GPN 738 M 12 x 1,5	18,4	M 12 x 1,5	9	16	10	73812150000
GPN 738 M 14 x 1,5	20,4	M 14 x 1,5	9	17	10	73814150000
GPN 738 M 16 x 1,5	23,4	M 16 x 1,5	10	20	13	73816150000
GPN 738 M 18 x 1,5	25,4	M 18 x 1,5	11	21	13	73818150000
GPN 738 M 22 x 1,5	28,4	M 22 x 1,5	12	22	15	73822150000
GPN 738 M 27 x 2	33,35	M 27 x 2	15	25	19	73827200000
GPN 738 M 33 x 2	42,3	M 33 x 2	15	25	24	73833200000
GPN 738 M 42 x 2	51,3	M 42 x 2	15	26	24	73842200000
GPN 738 M 48 x 2	56,3	M 48 x 2	17	28	30	73848200000
GPN 738 7/16 - 20 UNF	17,4	7/16 - 20 UNF	9	16	10	73826670000
GPN 738 9/16 - 18 UNF	21,4	9/16 - 18 UNF	10	18	10	73826680000
GPN 738 3/4 - 16 UNF	26,9	3/4 - 16 UNF	11	21	13	73826690000
GPN 738 7/8 - 14 UNF	30,4	7/8 - 14 UNF	13	23	15	73826700000
GPN 738 1 1/16 - 12 UN	37,85	1 1/16 - 12 UN	15	25	19	73826710000
GPN 738 1 5/16 - 12 UN	44,8	1 5/16 - 12 UN	15	25	24	73826720000
GPN 738 1 5/8 - 12 UN	55,8	1 5/8 - 12 UN	15	26	30	73826730000
GPN 738 1 7/8 - 12 UN	63,3	1 7/8 - 12 UN	15	26	30	73826740000

Dimensions in mm.

Information on materials, colours, designs and use of our products can be found on the website and in chapter 3 'Materials and application'. Engraving complies with GPN 736 series.

Your added values:



Better fit.

Suitable for internal threads in accordance with DIN 3852-1, ISO 11926.



Seals better.

The circumferential sealing lip (no mould-parting feature) and the O-ring prevent the penetration or leaking of liquids depending on the application.



More robust.

Made from premium impact-resistant polyamide.



Better.

Same design as GPN 736 but fitted with O-ring. For high leak proof requirements, e.g. untreated sealing surfaces, high process temperatures, long process times, and increased pressure inside the component.